JET-SET SEWING STATION

Pattern Information:

Sewing Notes
1/4“ seam allowances used throughout, unless noted otherwise
1/8” seam allowance for basting
RST = right sides together / WST = wrong sides together
Scant 1/4” seam allowance = just shy of a 1/4” seam allowance
Be sure to backstitch at beginning and end of seams to secure stitching.
For general quilting; make a quilt sandwich using the interior piece, (face down) foam stabiliser and exterior piece (right side up). Pin or spray-baste layers to secure. Quilt in straight lines 1” apart in a diagonal grid. Use a longer stitch length for quilting. Baste edges to secure and seal layers. Cutting instructions for the quilted sections have been given to allow for 1/4” shrinkage, to be trimmed to final size if necessary. If you feel you need more please adjust the cutting instructions accordingly.

Binding Notes
Instructions are given with a hand-sewn finish for pockets and binding. Binding is attached by machine on the interior side and folded over and hand-sewn on the exterior, unless otherwise noted. Please feel free to topstitch these areas on a sewing machine if this is preferred. Use a longer stitch length when topstitching. To make bias binding, cut a square of fabric in half diagonally, with RST sew triangles together along one short side (it will look like a parallelogram shape). Press seam open. Cut 2” wide strips across the fabric. With RST join ends of strips to form one continuous piece. Fold binding in half lengthwise, and press raw edges to centre.

Pattern Tips
* To round edges: Use a curved object (a side plate, small biscuit tin etc.) and a water-soluble pen to round corners to make a continuous curve. Cut on drawn line.
* Vinyl can be sticky to work with! Use a Teflon foot to avoid any difficulty – or as I do, stick a length of Washi Tape alongside to your sewing machine plate when sewing.
* When sewing vinyl use binding clips instead of pins to avoid damaging the material.
* Elastic handle is made with 19” length; please adjust this to your own preference. Also I discovered not all elastic has the same stretch! Please bare this in mind when cutting. Also ensure you do not stretch the elastic when measuring for your desired length.

+ Please read through all instructions before beginning.

Cutting Instructions:

NOTE: *All cutting instructions are listed width x height*.
See suggested cutting layouts on the following page.

From Exterior Fabric (Half Yard):
(1) 9.5” x 6.25” vinyl pocket exterior
(1) 9.5” x 7.5” divided pocket exterior
(2) 9.25” x 5” divided pocket
(2) 7.75” x 4” divided pocket flap
(1) 9.5” x 9.5” mesh pocket exterior
(2) 8” x 5” side flap exterior

From Interior Fabric (Fat Quarter):
(1) 9.25” x 7.5” divided pocket background
(1) 9.5” x 9.5” mesh pocket background
(1) 9.5” x 6.25” vinyl pocket interior
(1) 9.25” x 1.5” vinyl pocket interior facing

From Interior Contrast Fabric (Long Quarter):
(1) 9.25” x 3” zipper facing, small
(1) 9.25” x 3.5” zipper facing, large
(2) 3.75” x 2” zipper tab
(2) 3.25” x 2.75” vinyl pocket side facing
(1) 9.25” x 3.5” vinyl pocket bottom facing
(2) 8” x 5” side flap interior
(2) 6” x 4” needle-keep
(1) 27” x 2” elastic casing

From Binding Fabric (Half Yard):
(1) 9.25” x 2” divided pocket binding
(1) 9.5” x 2” mesh pocket binding
(1) 9.25” x 2” interior facing
(2) 9.25” x 2” exterior facing
(1) 18” x 18” **
***Cut square in half diagonally. With RST sew the two triangles together along one short side. Press seam open. From the resulting parallelogram, cut 2” strips aligning ruler along long bias direction. Join ends of strips by aligning RST, offsetting tips. See binding diagram for reference.*
Sub-cut the following from the bias strip:
(1) 12” x 2” divided pocket flap binding
(2) 12” x 2” side flap binding
(1) 10” x 2” needle-keep binding
(1) 74” x 2” exterior binding

From Vinyl Fabric:
(1) 8” x 3.25” vinyl pocket

From Mesh:
(1) 9.5” x 6.25” mesh pocket


From Felt:
(2) 4.5” x 3”


From Fusible Interfacing (Half Yard):
(1) 9.5” x 6.25” vinyl pocket exterior
(1) 9.5” x 9.5” mesh pocket exterior
(1) 9.5” x 7.5” divided pocket exterior
(2) 9.25” x 5” divided pocket
(1) 9.25” x 7.5” divided pocket background
(2) 7.75” x 4” divided pocket flap
(4) 8” x 4” side flap
(2) 6” x 4” needle-keep


Copyright ©2017 - 2018 Jessie Fincham for Sew and Quilt | All Rights Reserved | www.sewandquilt.co.uk


From Foam Sew-In Stabiliser:
(1) 9.5” x 9.5” mesh pocket
(1) 9.5” x 6.25” vinyl pocket
(1) 9.5” x 7.5” divided pocket
(2) 8” x 4” side flap

For best use of fabric, please follow suggested cutting layouts below (providing your fabric width is the same as below);

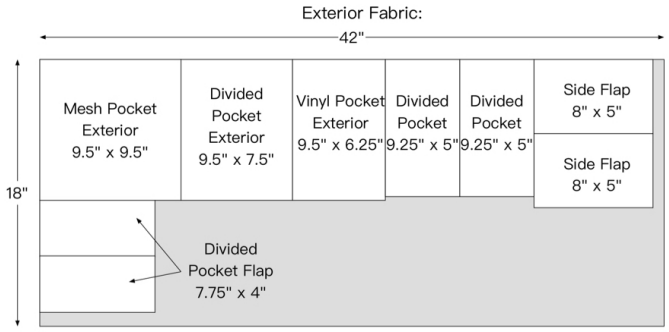


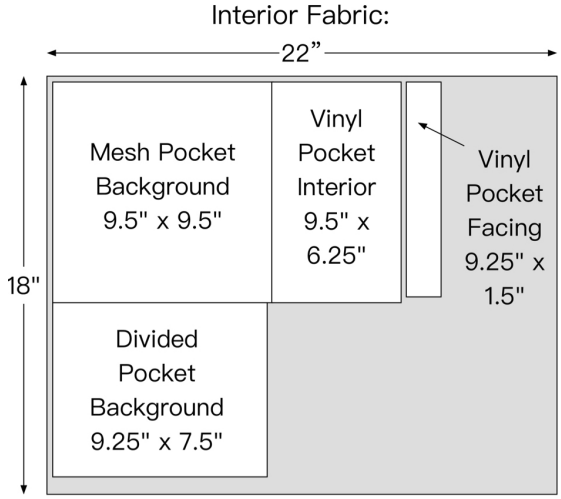


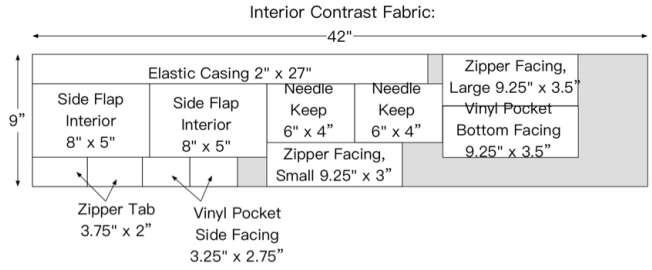


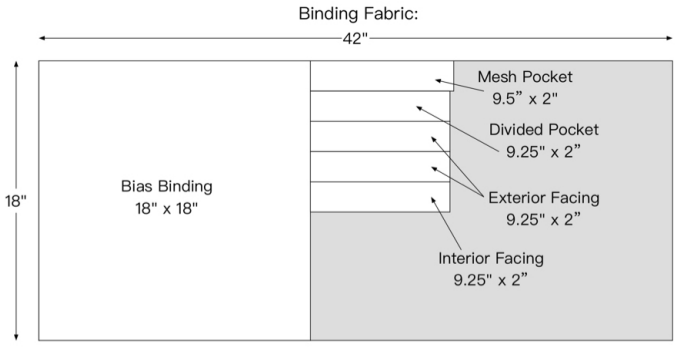

Binding Diagram:

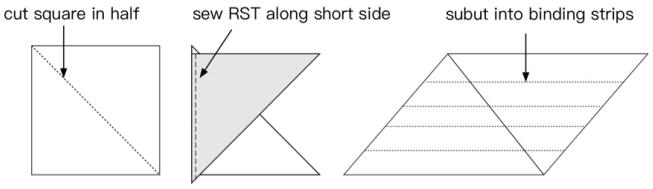

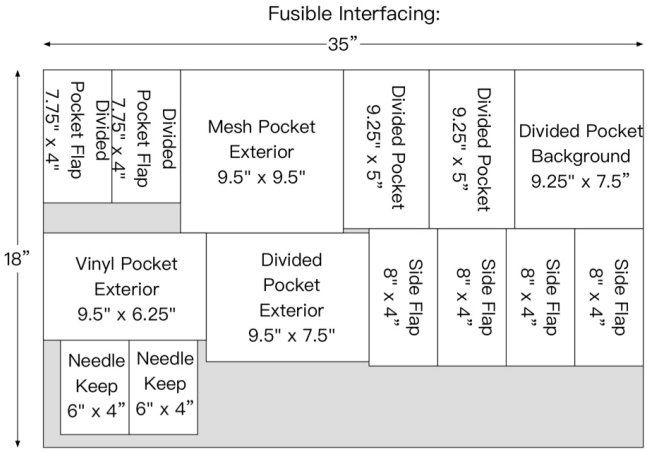

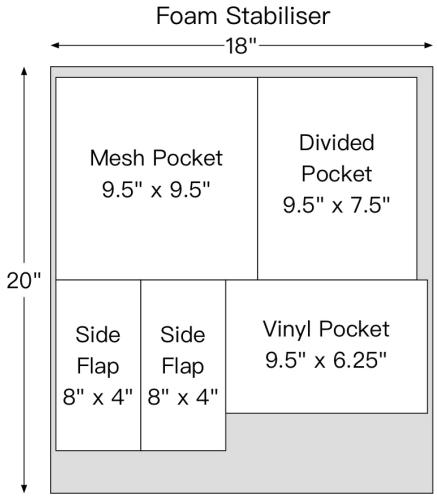


Assembly:

Step 1: Make Vinyl Pocket


a. Fuse interfacing to vinyl pocket exterior. Quilt vinyl pocket interior and exterior pieces together, following general quilting instructions above. Baste edges to secure layers.

Sew vinyl pocket interior facing to quilted background aligning longer widths (with both interior sides facing). *This un-quilted facing allows you to fold and close the case once finished.* Press seam. Set aside.


Copyright ©2017 - 2018 Jessie Fincham for Sew and Quilt | All Rights Reserved | www.sewandquilt.co.uk

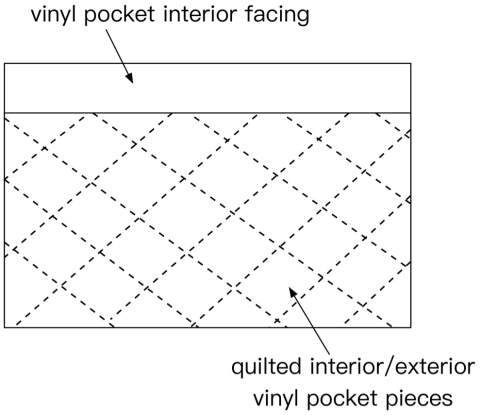

b. Trim zipper to 9.25".
Zipper tabs: Fold both zipper tab pieces in half (so shorter sides meet), press. Open and press raw edges to centre. Fold again to create binding. Sew to zipper ends with 1/8" seam allowance. Trim zipper tabs to same width as zip. Set aside.

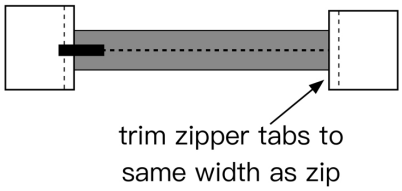


c. Fold both vinyl pocket side facings in half lengthwise, WST. Press and carefully baste long raw edge. Sew both side facings to vinyl piece, aligning pressed edge with shorter side of vinyl. Finger-press side facings away from vinyl.

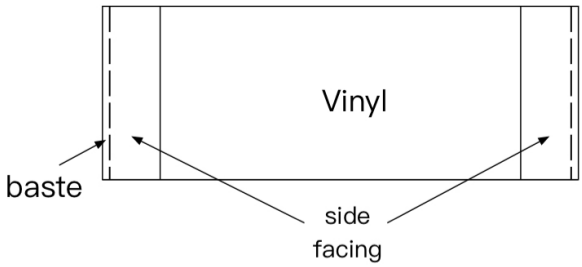


Attach the vinyl pocket bottom facing in the same manner: Fold vinyl pocket bottom facing in half lengthwise, WST. Press and baste long raw edge. Sew to vinyl pocket, matching pressed edge to vinyl. Finger-press seam away from vinyl.


d. Press the small zipper facing raw edges over WST, by pressing 1/4" on each side, creating a binding.

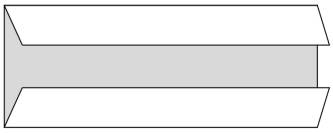

Sew to vinyl, RST and finger press seam away from vinyl. Fold the opposite side of the facing over the vinyl to meet. Secure with pins or binding clips and topstitch along the edge, catching the previous seam allowance that is folded behind.

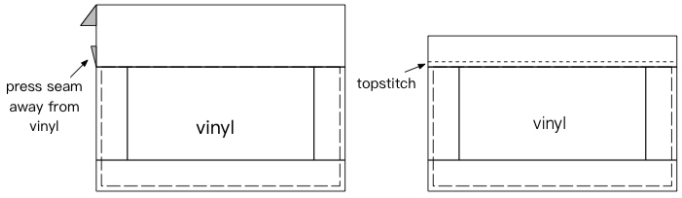


e. Place zipper face down onto vinyl pocket piece, RST. Sew along top edge using a zipper foot and adjusting the zip to open/closed when sewing. Fold zip away from zipper teeth and finger press down.

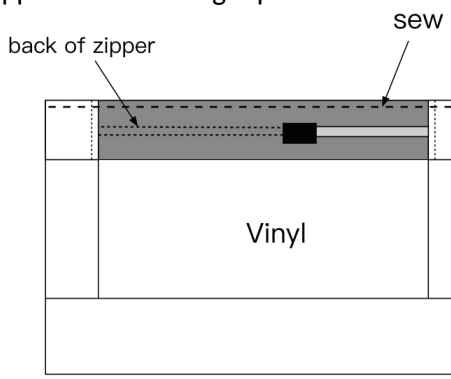

f. Fold the large zipper facing in half lengthwise WST, press and baste along longer raw edge. Layer onto vinyl pocket (zipper facing right side up, matching top of zipper to the pressed seam). Sew along zipper tape. Press both facings away from zipper.

g. Layer completed vinyl pocket aligning bottom raw edge onto vinyl pocket interior with right sides both facing upwards. Baste.
The vinyl pocket exterior facing will be exposed on the exterior side, this is correct. Rest assured, it will be covered by the exterior facing once you assemble your sewing station in step 5(c).

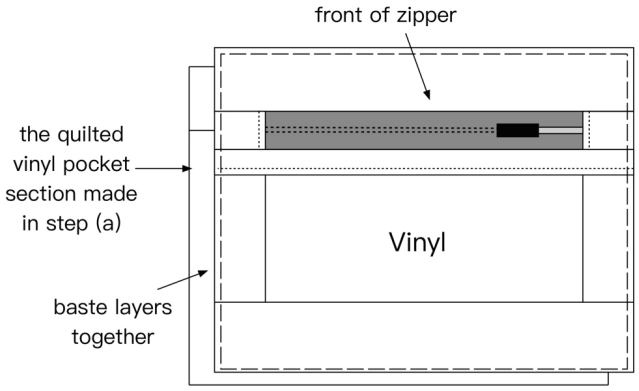

Step 2: Make Divided Pocket


a. Fuse interfacing to divided pocket exterior piece. Layer foam stabiliser with divided pocket exterior piece, right side up. Quilt in straight lines 1" apart in a diagonal grid. Set aside.

b. Fuse interfacing to both divided pocket pieces and interior divided pocket background piece.
c. Place divided pocket pieces WST and baste. Sew divided pocket binding along longer edge. Layer divided pocket onto interior divided pocket background, aligning raw edges at the bottom. Baste.

Copyright ©2017 - 2018 Jessie Fincham for Sew and Quilt | All Rights Reserved | www.sewandquilt.co.uk

d. Measure approximately 3” and 5” from right-hand side of pocket, mark with a water-soluble pen and draw a straight line from the top to bottom. Sew on drawn lines.

e. Fuse interfacing to both divided pocket flap pieces. Place WST and baste. Quilt sides together in straight lines 1” apart in a diagonal grid. Use a longer stitch length for quilting. Round two corners (longer side). Sew divided pocket flap binding along the curved edge. Baste flap to the top of the divided pocket.

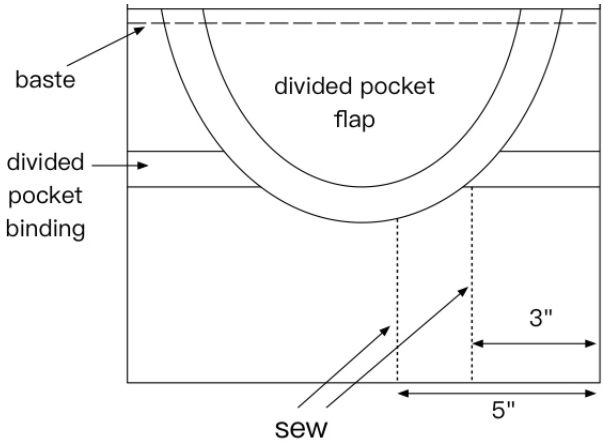

f. Layer the interior divided pocket section onto the quilted exterior piece as made in step (a), WST. Baste around the edge.

Step 3. Make Mesh Pocket

a. Fuse interfacing to mesh pocket exterior piece. Quilt mesh pocket interior and exterior pieces together, following general quilting instructions above. Set aside.

b. Carefully sew mesh pocket binding along one longer side of mesh. Pin mesh pocket to quilted background piece and baste, aligning raw edges to the bottom of the pocket. Trim 9.25” square, if required.
TIP: A stiletto tool is useful for feeding the delicate mesh through the sewing machine.

Step 4: Make Side Flaps


a. Fuse interfacing to side flap pieces, align interfacing with edge of each piece. Quilt interior and exterior side flap pieces together, following general quilting instructions above. *You will have a section on each flap that is not covered by interfacing or stabiliser, this is will allow the side flaps to lie flat when in use*. Repeat step, so you have two quilted side flaps.

b. Round the sides (the side that is covered by stabiliser and interfacing) to make a continuous curve. Sew side flap binding to the curved edge of each piece.

c. For the needle keep: Fuse interfacing to both needle-keep pieces. Place WST and baste. Quilt sides together in straight lines 1” apart in a diagonal grid. Use a longer stitch length for quilting. Round two corners (the longer side) to make a continuous curve. Sew needle-keep binding to the curved edge. Round edges of each felt piece (the longer sides) and pinking shear edges.

d. Layer a side flap, (exterior face down) the two felt pieces, and the needle keep on top. Pin to secure all the layers correctly and baste along raw edge.


e. Mark a notch approximately 1.75” down from the centre of the side flap and attach a snap fastening following the manufacturer’s instructions. Align the opposite side of the snap onto the smaller needle-keep flap and attach.

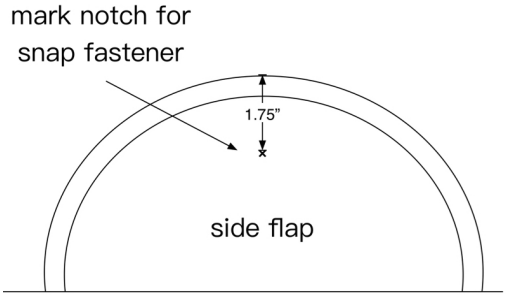

Step 5: Assemble

a. Sew interior facing to the bottom of the divided pocket interior, RST. Sew to the top of the mesh pocket, with interior sides facing and sew.

b. Sew the vinyl pocket to the bottom of the mesh pocket, with interior sides facing.

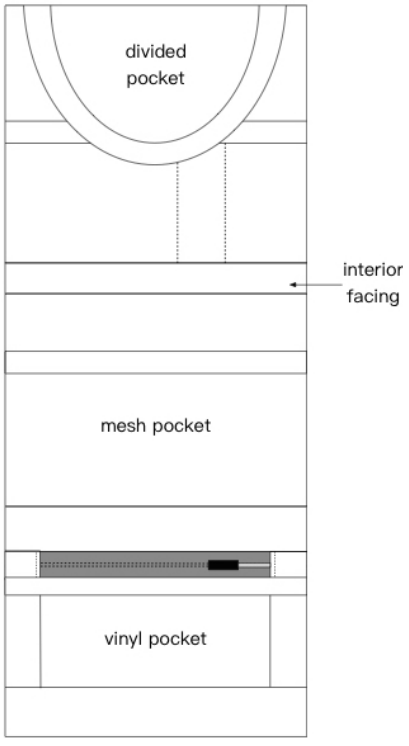

c. Turn the case over and sew exterior facing to exposed exterior join between divided pocket and mesh pocket sections; begin by aligning raw edges of exterior facing and one edge of an exterior side RST, sew. Fold over the facing to the opposite side and pin (*be careful not to pull the facing too far over, so the case can open and close with ease*). Hand-sew with a neat blind stitch. Repeat step with the remaining exterior facing piece for the exposed exterior join between mesh pocket and vinyl pocket section.
d. Baste side flaps to both sides of mesh pocket, interior sides facing. See Fig. 5(d).

e. Make elastic handle: Fold elastic casing in half, lengthwise with RST. Sew along raw edge, using a

Copyright ©2017 - 2018 Jessie Fincham for Sew and Quilt | All Rights Reserved | www.sewandquilt.co.uk

scant ¼" seam allowance. You will now have a long tube.



Use a loop turner to open to turn the tube inside out. Using a safety pin feed the elastic through the tube; keep tight of the other end of the elastic and push excess fabric down as you feed it through. Baste ends to hold into position.
TIP: Ensure the elastic handle is facing towards the exterior side when attaching exterior binding.


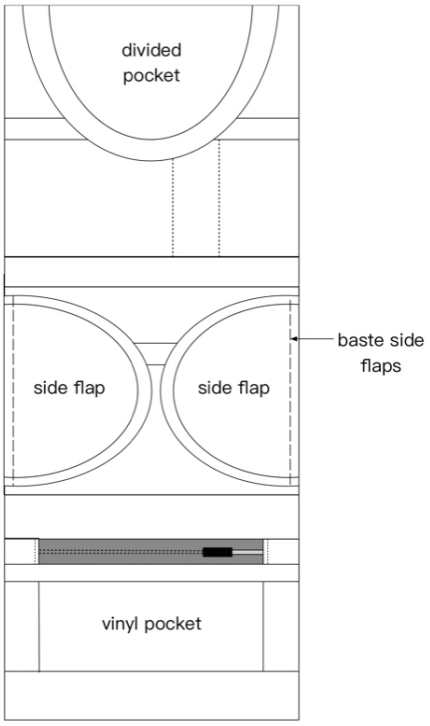


Fig: 5(d).


On the exterior side, mark a small notch approximately 9.5" from the top left-hand side (vinyl pocket end). Fold the elastic handle in half and use a binding clip to hold layers securely, aligning the two halves directly on top of each other. Sew into place, with extra backstitching.

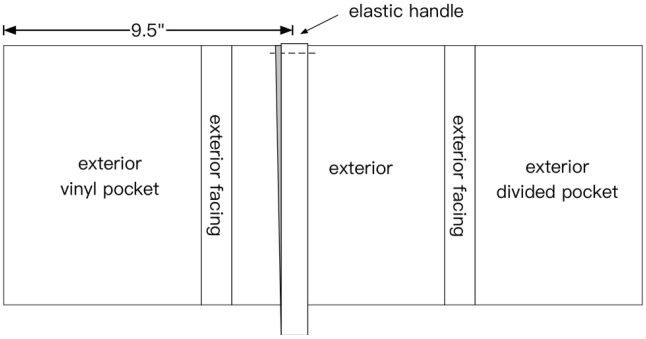

f. Exterior binding: Sew bias binding to interior side, leaving an approximate 4" tail at the start. Mitre corners as you go. Stop sewing approximately 4" from original starting point, backstitch. Leave a 4-6" unsewn tail, unfold and mark a 45-degree line on ending binding tail (tracing along 45-degree trimmed edge of beginning tail. Draw a second line 1/2" further along the binding strip. Cut on second line. Place binding edges RST, aligning edges and offsetting points. Pin, and sew on first drawn line. Sew remaining section of binding. Fold binding to backside and hand sew to finish.

You're finished, congratulations! Please share your **JET-SET SEWING STATION** on social media!
#jetsetsewingstation
@messyjesse1 | @sewandquilt
www.sewandquilt.co.uk



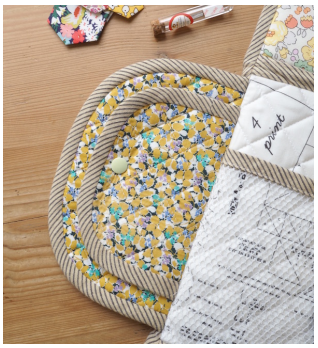







Fabrics used are a range of Liberty Tana Lawns and quilting cottons. All supplies required are available at www.sewandquilt.co.uk.

This pattern is protected by copyright and is intended for personal use of the purchaser only. All types of reproduction or duplication are prohibited without written consent. Please respect the time, energy and outlay it took the designer to make this pattern.

Copyright ©2017 - 2018 Jessie Fincham for Sew and Quilt | All Rights Reserved | www.sewandquilt.co.uk

JET-SET SEWING STATION

Keep track of all those pieces!
Make a copy of this page and cut out these handy labels to pin to your pieces as you cut.
Don't be afraid of the number of pieces! The pattern is broken down into separate sections with clear instructions for your sewing pleasure.

JET SET STATION **Exterior Fabric** **vinyl pocket** **exterior** 9.5" x 6.25"	JET SET STATION **Exterior Fabric** **divided pocket** **exterior** 9.5" x 7.5"	JET SET STATION **Exterior Fabric** **divided pocket** 9.25" x 5"	JET SET STATION **Exterior Fabric** **divided pocket** 9.25" x 5"	JET SET STATION **Exterior Fabric** **divided pocket** **flap** 7.75" x 4"	JET SET STATION **Exterior Fabric** **divided pocket** **flap** 7.75" x 4"	JET SET STATION **Exterior Fabric** **mesh pocket** **exterior** 9.5" x 9.5"
JET SET STATION **Exterior Fabric** **side flap exterior** 8" x 5"	JET SET STATION **Exterior Fabric** **side flap exterior** 8" x 5"	JET SET STATION **Interior Fabric** **divided pocket** **background** 9.25" x 7.5"	JET SET STATION **Interior Fabric** **mesh pocket** **background** 9.5" x 9.5"	JET SET STATION **Interior Fabric** **vinyl pocket** **interior** 9.5" x 6.25"	JET SET STATION **Interior Fabric** **vinyl pocket** **interior facing** 9.25" x 1.5"	JET SET STATION **Interior Contrast** **Fabric** **zipper facing,** **small** 9.25" x 3"
JET SET STATION **Interior Contrast** **Fabric** **zipper facing,** **large** 9.25" x 3.5"	JET SET STATION **Interior Contrast** **Fabric** **zipper tab** 3.75" x 2"	JET SET STATION **Interior Contrast** **Fabric** **zipper tab** 3.75" x 2"	JET SET STATION **Interior Contrast** **Fabric** **vinyl pocket side** **facing** 3.25" x 2.75"	JET SET STATION **Interior Contrast** **Fabric** **vinyl pocket side** **facing** 3.25" x 2.75"	JET SET STATION **Interior Contrast** **Fabric** **vinyl pocket** **bottom facing** 9.25" x 3.5"	JET SET STATION **Interior Contrast** **Fabric** **side flap interior** 8" x 5"
JET SET STATION **Interior Contrast** **Fabric** **side flap interior** 8" x 5"	JET SET STATION **Interior Contrast** **Fabric** **needle-keep** 6" x 4"	JET SET STATION **Interior Contrast** **Fabric** **needle-keep** 6" x 4"	JET SET STATION **Interior Contrast** **Fabric** **elastic casing** 27" x 2"	JET SET STATION **Binding Fabric** **divided pocket** **binding** 9.25" x 2"	JET SET STATION **Binding Fabric** **mesh pocket** **binding** 9.5" x 2"	JET SET STATION **Binding Fabric** **interior facing** 9.25" x 2"
JET SET STATION **Binding Fabric** **exterior facing** 9.25" x 2"	JET SET STATION **Binding Fabric** **exterior facing** 9.25" x 2"	JET SET STATION **Binding Fabric** **divided pocket** **flap binding** 12" x 2"	JET SET STATION **Binding Fabric** **side flap binding** 12" x 2"	JET SET STATION **Binding Fabric** **side flap binding** 12" x 2"	JET SET STATION **Binding Fabric** **needle-keep** **binding** 10" x 2"	JET SET STATION **Binding Fabric** **exterior binding** 74" x 2"
JET SET STATION **Vinyl Fabric** **vinyl pocket** 8" x 3.25"	JET SET STATION **Mesh Fabric** **mesh pocket** 9.5" x 6.25"	JET SET STATION **Felt Fabric** 4.5" x 3"	JET SET STATION **Fusible** **Interfacing** **vinyl pocket** **exterior** 9.5" x 6.25"	JET SET STATION **Fusible** **Interfacing** **mesh pocket** **exterior** 9.5" x 9.5"	JET SET STATION **Fusible** **Interfacing** **divided pocket** **exterior** 9.5" x 7.5"	JET SET STATION **Fusible** **Interfacing** **divided pocket** 9.25" x 5"
JET SET STATION **Fusible** **Interfacing** **divided pocket** 9.25" x 5"	JET SET STATION **Fusible** **Interfacing** **divided pocket** **background** 9.25" x 7.5"	JET SET STATION **Fusible** **Interfacing** **divided pocket** **flap** 7.75" x 4"	JET SET STATION **Fusible** **Interfacing** **divided pocket** **flap** 7.75" x 4"	JET SET STATION **Fusible** **Interfacing** **side flap** 8" x 4"	JET SET STATION **Fusible** **Interfacing** **side flap** 8" x 4"	JET SET STATION **Fusible** **Interfacing** **side flap** 8" x 4"
JET SET STATION **Fusible** **Interfacing** **side flap** 8" x 4"	JET SET STATION **Fusible** **Interfacing** **needle-keep** 6" x 4"	JET SET STATION **Fusible** **Interfacing** **needle-keep** 6" x 4"	JET SET STATION **Foam Stabiliser** **mesh pocket** 9.5" x 9.5"	JET SET STATION **Foam Stabiliser** **vinyl pocket** 9.5" x 6.25"	JET SET STATION **Foam Stabiliser** **divided pocket** 9.5" x 7.5"	JET SET STATION **Foam Stabiliser** **side flap** 8" x 4"
JET SET STATION **Foam Stabiliser** **side flap** 8" x 4"						

Copyright ©2017 - 2018 Jessie Fincham for Sew and Quilt | All Rights Reserved | www.sewandquilt.co.uk